Standard equipment

Screwdriver

For Model 6826
Magnetic Socket Bit
Locator Assembly
Plastic Carrying Case

For Model 6827
Phillips Bit 2-45mm
Front Cap
Plastic Carrying Case

Note : The standard equipment for the machine may differ from country to country.

Optional accessories

Screwdriver

For Model 6826

Socket bit
(1 per pkg.)



A (mm)	L (mm)	Size	Part No.
11.1	65	7/16”	784414-8
8		M5	784415-6

Magnetic socket bit
(1 per pkg.)



A (mm)	L (mm)	Part No.
3/8”	65	784802-9
5/16”	65	784804-5
1/4”		784803-7
7/16”		784805-3
10 mm		784806-1

Locator assembly
(For magnetic socket bit)
• For socket bit Part No. 784414-8

For bit size		Part No.
3/8” & 10 mm		152823-3
5/16”		152822-5
1/4”	ø13	152821-7
7/16”	ø19.4	152824-1
7/16”		• 417621-5

Phillips insert bit
(3 per pkg.)

For bit size	Part No.
1 — 25	798313-8
2 — 25	798312-0
3 — 25	798314-6

Bit Holder
(For insert bit)

For bit size	Size	Part No.
Magnetic	6.35 — 60	784807-9
Non-magnetic	6.35 — 60	784615-8

Locator assembly
(For phillips insert bit)



Part No. 152483-1

For Model 6827

Phillips bit
(3 per pkg.)
* 1 per pkg.
◊ Hard type



Bit No.	L (mm)	Part No.
No. 2	45	798308-1
	*◊ 45	784229-3
	65	798309-9
	*◊ 65	784230-8
	110	798337-4
	150	798338-2
	* 250	784221-9
No. 3	45	798310-4
	65	798311-2
	110	798339-0

Socket bit
(1 per pkg.)
• For self-drilling screw



A (mm)	L (mm)	Size	Part No.
7	55	M4	784402-5
8		M5	784403-3
9.5		1/4”	• 784404-1
10		M6	784405-9
10	70	M6	784406-7
14	55	M8	784409-1

Magnetic socket bit
(1 per pkg.)



A (mm)	L (mm)	Part No.
5/16”	55	784808-7
3/8”		784809-5

Front cap

Size (mm)	Part No.
12	322070-2
15.5	322069-7

Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPAN Z14292-2 2001-1

A world’s leading manufacturer of power tools

Double Insulation
Variable Speed
Reversing

Screwdriver

Model 6826
Model 6827 (with fastening torque control)

Superior fastening with powerful 570 W motor.

Photo: Model 6827

Performance Data

Note: It may differ under some conditions.

Model 6826

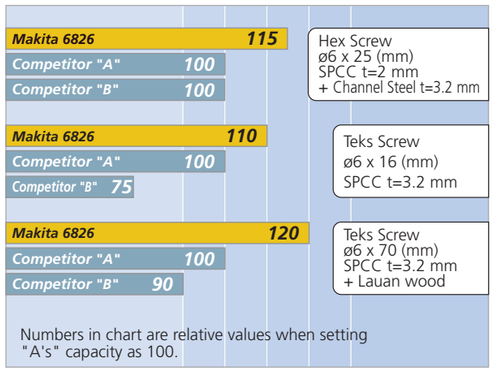
Makita 6826 115
Competitor "A" 100
Competitor "B" 100
Hex Screw ø6 x 25 (mm) SPCC t=2 mm + Channel Steel t=3.2 mm
Makita 6826 110
Competitor "A" 100
Competitor "B" 75
Teks Screw ø6 x 16 (mm) SPCC t=3.2 mm
Makita 6826 120
Competitor "A" 100
Competitor "B" 90
Teks Screw ø6 x 70 (mm) SPCC t=3.2 mm + Lauan wood
Numbers in chart are relative values when setting "A's" capacity as 100.
Slow 90 100 110 120 Fast

Model 6827

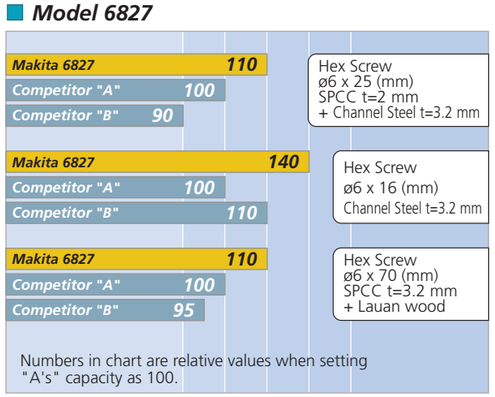
Makita 6827 110
Competitor "A" 100
Competitor "B" 90
Hex Screw ø6 x 25 (mm) SPCC t=2 mm + Channel Steel t=3.2 mm
Makita 6827 140
Competitor "A" 100
Competitor "B" 110
Hex Screw ø6 x 16 (mm) Channel Steel t=3.2 mm
Makita 6827 110
Competitor "A" 100
Competitor "B" 95
Hex Screw ø6 x 70 (mm) SPCC t=3.2 mm + Lauan wood
Numbers in chart are relative values when setting "A's" capacity as 100.
Slow 90 100 110 140 Fast

Optimum For Fastening Teks or Hex Screw

Powerful **570 W** Motor

Features Fastening Torque Control

Adjustment for fastening torque: 6 stages

PHOTO: Model 6827

PHOTO: Model 6826

Durable Cord Guard

All Ball & Needle Bearing

Specifications

Double Insulation

Variable Speed

Reversing

Capacities	Model 6826	Model 6827
Teks screw	6 mm (#14)	6 mm (#14)
Wooden screw	—	6.2 mm (1/4")
Machine screw	—	6.35 mm (1/4")
Continuous rating Input	570 W	570 W
No load speed	0 - 2,500 RPM	0 - 2,500 RPM
Overall length	282 mm (11-1/8")	293 mm (11-1/2")
Net weight	1.5 kg (3.3 lbs)	1.8 kg (4.0 lbs)
Power supply cord	2.5 m (8.2 ft)	2.5 m (8.2 ft)

Specifications may differ from country to country

Dimension

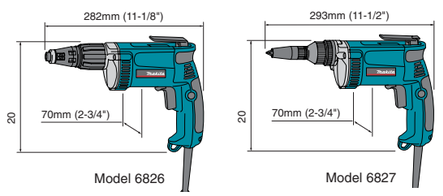

1. Retractable Belt Clip

Retractable Belt clip allows operation in tight area.

2. Well-Designed Soft Grip Handle for Increased Comfort

Ergonomically designed for reduced operator fatigue.

3. Aluminum Gear Housing

Sturdy cast aluminum gear housing.

4. Air-Cooling Ports Designed User Friendly

Cooling air always flows toward the front of tool for comfortable operation.

5. Durable New Switch (Large trigger with reversing switch)

Dust-proof switch for longer life and large trigger for great comfortable operation.